

# TI2007-034 DC to 2 Pin-CAT<sup>®</sup> Connector 15' 2/0 Cable Assembly



Power Anytime, Anywhere

The Tesla™ TI2007-034 DC to 2-Pin CAT<sup>®</sup> Connector 15' 2/0 Cable Assembly. Constructed from a rugged combination of advanced composite materials and corrosion-resistant alloys, it has been engineered to be compatible with Caterpillar<sup>®</sup> equipment. It features Tesla™ TI2005-410 DC Battery Connector and the TI2000-294 2-Pin Cat<sup>®</sup> Connector. The result is a weatherproof assembly that will withstand the harshest environments.

## Features:

- UV, fuel, fungus, water and oil resistant
- Easy component replacement
- Rated to 3000 peak amps
- 15ft, 2/0 cable assembly
- Manufactured by Tesla™




Tesla™ Industries, Inc.  
www.teslainsd.com ♦ www.tesla1.com  
Email: tesla1@teslainsd.com  
**Headquarters:** (302) 324-8910  
101 Centerpoint Blvd. New Castle, DE 19720  
**Western Regional Office:** (775) 622-8801  
9475 Double R Blvd. Suite 2, Reno, NV 89521



The **POWER**  
Of  
**RED**™



# Components - Specifications - Parts

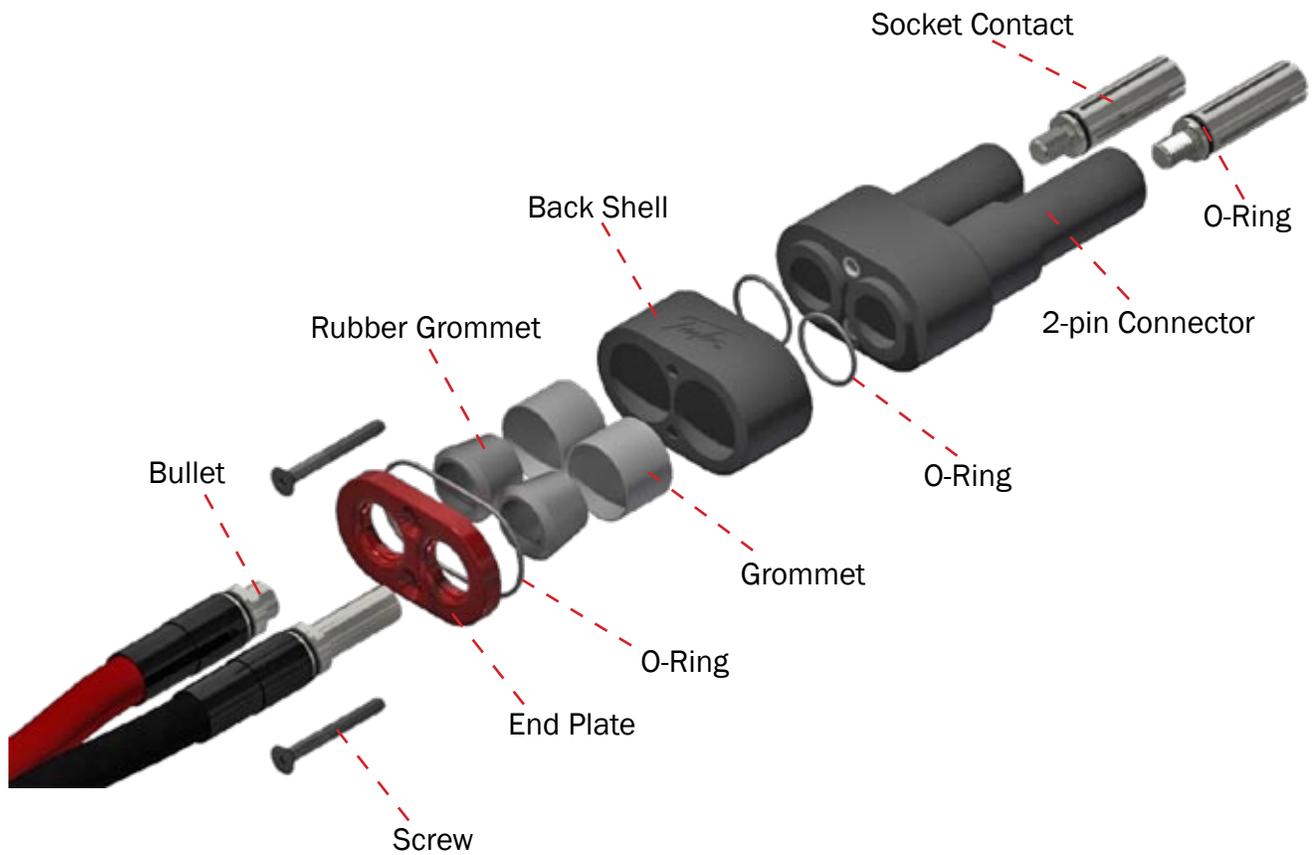

## Technical Specifications:

Input Voltage Range	18 - 32 Vdc
Rated Current	1500 A
Peak Current	3000 A
Cable Length / Cable Type	15 ft / 2/0
Weight	15.65 lbs. (7.09 kg)
Warranty	2 years (3 years optional)



TI2000-294 2-Pin Cat® Connector

## Replacement Parts:



TI2004-105  
Contact Replacement Tool



TI2000-368  
Positive / Negative Slotted  
Contact w/ o-ring



TI2004-092  
2-Pin Cat® Replacement  
Negative Bullet



TI2004-093  
2-Pin Cat® Replacement  
Positive Bullet